



XTRU-3776
(silver anodized
w/ frosted cover)



(black anodized
w/rounded endcap)




frosted cover



black opal cover



mounting clip

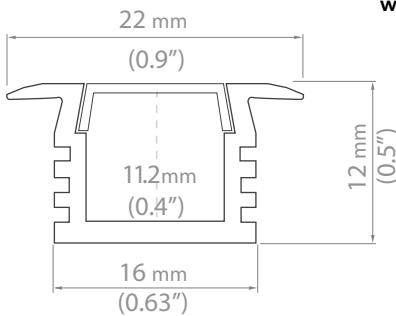

XTRU-3776 LED Profile is a small durable fixture designed to fit narrow areas, wall surfaces and drywall applications.

This versatile profile is suitable for custom recessed installation in walls and ceilings, cabinets and under bars and more.

This high quality profile offers an unique way to make use of linear low voltage lighting and can be customized to suit outdoor applications with proper P67 rated LED light strips and sealed assembly.

FEATURES

- IP65 rating option with proper install
- special collar conceals unfinished install groves or rough edges in rock or stone.
- easy install mounting clip option
- black and anodized aluminum available
- frosted and black opal cover options
- endcaps and mounting clips included

*IP67 relies on proper sealing on install.

ENDCAPS

(available in grey, white and black)




Endcap w/ Hole



Endcap Closed

- 1** MALE CONNECTOR
- 2** FEMALE CONNECTOR
- 3** NO CONNECTOR

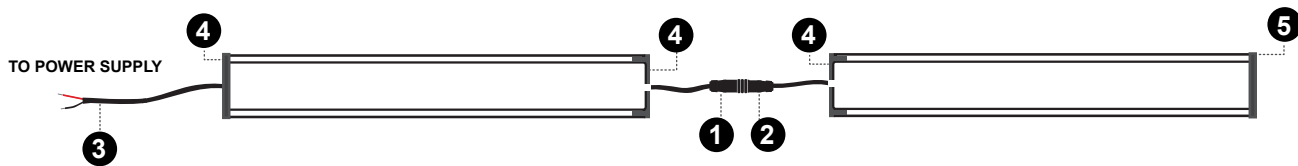

ORDERING

Example:

XTRU-3776- 48"- NA - F - CW - R - 48 - C

XTRU-3776 Profile, 48" Cut Length, Non-Anodized Aluminum Finish, Frosted Cover w/ Cool White LED, Right Facing Lead Wire, 12" Wire Length, Closed End Cap

MODEL	CUT LENGTH	HOUSING FINISH	COVER	LED COLOR	LEAD WIRE LOCATION	LEAD WIRE LENGTH	END CAP
XTRU-3776	-	-	-	-	-	-	-
Aluminum LED Lighted Profile	Write desired length above	NA- Non-Anodized BA- Black Anodized	F - Frosted BO - Black Opal	WW - Warm White CW - Cool White NW - Neutral White RGB - Red, Green, Blue	R - Right Facing L - Left Facing B - Left & Right* (daisy chain)	Write Desired Length Above	C - Closed H - Hole

Impact Lighting Inc.

2814 Silver Star RD., Suite B, Orlando, Florida 32808 USA • Phone: 1.800.507.5714 • Email: sales@impact-lighting.com

www.impact-lighting.com

